

OG570

Reflection factor	
P_d	0.92

Reference thickness	
d [mm]	3

Spectral values guaranteed	
λ_c ($\tau_i = 0.50$) [nm]	= 570 ± 6
λ_s ($\tau_{is} = 1 \cdot 10^{-5}$) [nm]	= 500
λ_p ($\tau_{ip} = 0.93$) [nm]	= 640

Refractive index n		
λ [nm]	Element	n
587.6	He	1.51
852.1	Cs	1.51
1014	Hg	1.50

Density	
ρ [g/cm ³]	2.56

Bubble content	
Bubble class	3

Chemical resistance	
FR class	0
SR class	1.0
AR class	1.0

Transformation temperature	
T_g [°C]	510

Thermal expansion	
$\alpha_{-30/+70^\circ\text{C}}$ [10 ⁻⁶ /K]	7.9
$\alpha_{20/300^\circ\text{C}}$ [10 ⁻⁶ /K]	9.0
$\alpha_{20/200^\circ\text{C}}$ [10 ⁻⁶ /K]	

Temperature coefficient	
T_k [nm/°C]	0.12

Notes

Colloidally colored glass

Long pass filter


All data without tolerances are to be understood to be reference values. Guaranteed values are only those values listed in the section "Spectral values guaranteed".


Colorimetric evaluation

Illuminant	A (Planck T = 2856 K)		
	1	2	3
x	0.600	0.619	0.627
y	0.394	0.380	0.372
Y	56	49	46
λ_d [nm]	596	598	600
P_e	0.96	1.00	1.00

Illuminant	Planck T = 3200 K		
	1	2	3
x	0.595	0.616	0.624
y	0.398	0.384	0.375
Y	53	47	44
λ_d [nm]	595	598	599
P_e	0.96	1.00	1.00

Illuminant	D65 ($T_c = 6504$ K)		
	1	2	3
x	0.566	0.600	0.611
y	0.412	0.399	0.389
Y	43	36	33
λ_d [nm]	591	595	597
P_e	0.94	1.00	1.00

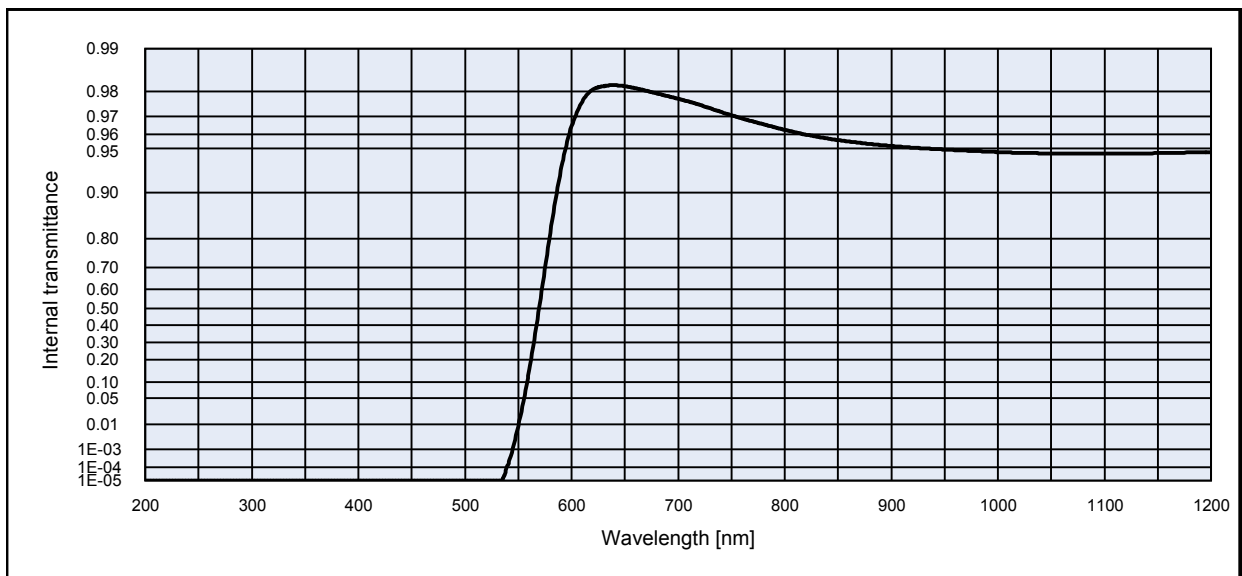

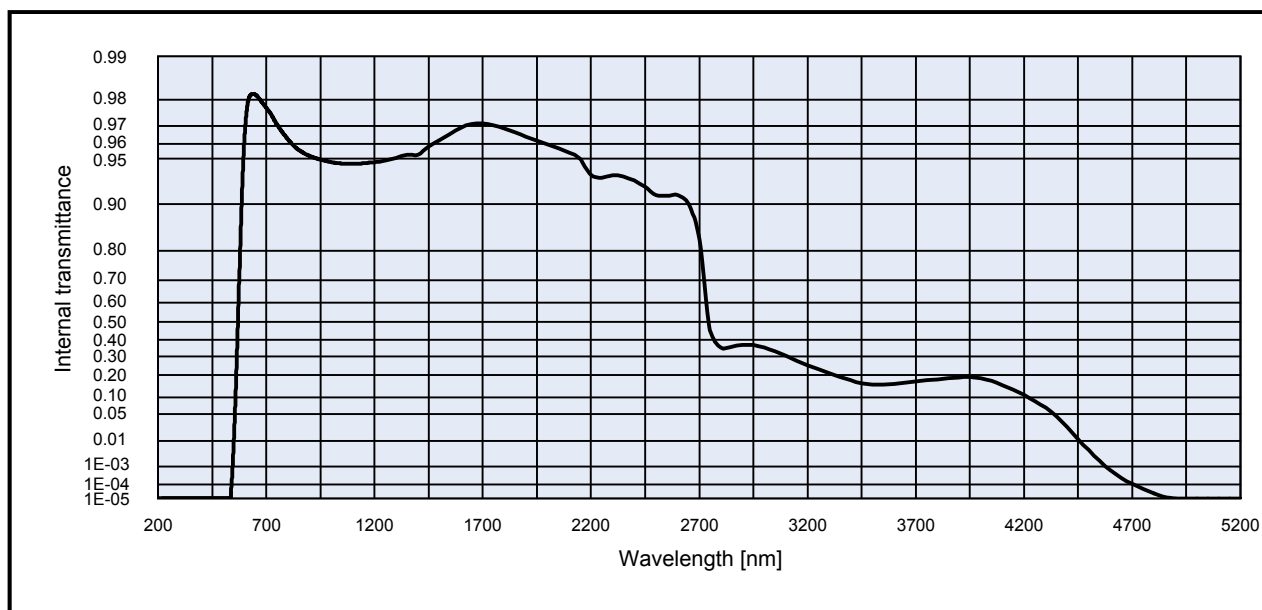

Internal transmittance τ_i at reference thickness d [mm] = 3
The internal transmittance values, tabulated and graphically represented, are reference values only

λ [nm]	τ_i	λ [nm]	τ_i	λ [nm]	τ_i	λ [nm]	τ_i	λ [nm]	τ_i	λ [nm]	τ_i
200	< 1.0E-05	500	< 1.0E-05	800	9.6E-01	1100	9.5E-01	2200	9.4E-01	3700	1.7E-01
210	< 1.0E-05	510	< 1.0E-05	810	9.6E-01	1110	9.5E-01	2250	9.3E-01	3750	1.7E-01
220	< 1.0E-05	520	< 1.0E-05	820	9.6E-01	1120	9.5E-01	2300	9.4E-01	3800	1.8E-01
230	< 1.0E-05	530	< 1.0E-05	830	9.6E-01	1130	9.5E-01	2350	9.3E-01	3850	1.8E-01
240	< 1.0E-05	540	1.3E-04	840	9.6E-01	1140	9.5E-01	2400	9.3E-01	3900	1.9E-01
250	< 1.0E-05	550	8.8E-03	850	9.6E-01	1150	9.5E-01	2450	9.2E-01	3950	1.9E-01
260	< 1.0E-05	560	1.4E-01	860	9.6E-01	1160	9.5E-01	2500	9.1E-01	4000	1.8E-01
270	< 1.0E-05	570	5.2E-01	870	9.5E-01	1170	9.5E-01	2550	9.1E-01	4050	1.7E-01
280	< 1.0E-05	580	8.2E-01	880	9.5E-01	1180	9.5E-01	2600	9.1E-01	4100	1.5E-01
290	< 1.0E-05	590	9.3E-01	890	9.5E-01	1190	9.5E-01	2650	9.0E-01	4150	1.3E-01
300	< 1.0E-05	600	9.6E-01	900	9.5E-01	1200	9.5E-01	2700	8.3E-01	4200	1.1E-01
310	< 1.0E-05	610	9.8E-01	910	9.5E-01	1250	9.5E-01	2750	4.6E-01	4250	8.8E-02
320	< 1.0E-05	620	9.8E-01	920	9.5E-01	1300	9.5E-01	2800	3.5E-01	4300	6.6E-02
330	< 1.0E-05	630	9.8E-01	930	9.5E-01	1350	9.5E-01	2850	3.6E-01	4350	4.4E-02
340	< 1.0E-05	640	9.8E-01	940	9.5E-01	1400	9.5E-01	2900	3.7E-01	4400	2.5E-02
350	< 1.0E-05	650	9.8E-01	950	9.5E-01	1450	9.6E-01	2950	3.7E-01	4450	1.1E-02
360	< 1.0E-05	660	9.8E-01	960	9.5E-01	1500	9.6E-01	3000	3.5E-01	4500	4.9E-03
370	< 1.0E-05	670	9.8E-01	970	9.5E-01	1550	9.7E-01	3050	3.3E-01	4550	1.9E-03
380	< 1.0E-05	680	9.8E-01	980	9.5E-01	1600	9.7E-01	3100	3.1E-01	4600	6.6E-04
390	< 1.0E-05	690	9.8E-01	990	9.5E-01	1650	9.7E-01	3150	2.8E-01	4650	2.5E-04
400	< 1.0E-05	700	9.8E-01	1000	9.5E-01	1700	9.7E-01	3200	2.5E-01	4700	1.1E-04
410	< 1.0E-05	710	9.8E-01	1010	9.5E-01	1750	9.7E-01	3250	2.3E-01	4750	5.3E-05
420	< 1.0E-05	720	9.8E-01	1020	9.5E-01	1800	9.7E-01	3300	2.1E-01	4800	2.5E-05
430	< 1.0E-05	730	9.7E-01	1030	9.5E-01	1850	9.7E-01	3350	1.9E-01	4850	1.2E-05
440	< 1.0E-05	740	9.7E-01	1040	9.5E-01	1900	9.6E-01	3400	1.7E-01	4900	< 1.0E-05
450	< 1.0E-05	750	9.7E-01	1050	9.5E-01	1950	9.6E-01	3450	1.6E-01	4950	< 1.0E-05
460	< 1.0E-05	760	9.7E-01	1060	9.5E-01	2000	9.6E-01	3500	1.5E-01	5000	< 1.0E-05
470	< 1.0E-05	770	9.7E-01	1070	9.5E-01	2050	9.6E-01	3550	1.5E-01	5050	< 1.0E-05
480	< 1.0E-05	780	9.7E-01	1080	9.5E-01	2100	9.5E-01	3600	1.6E-01	5100	< 1.0E-05
490	< 1.0E-05	790	9.6E-01	1090	9.5E-01	2150	9.5E-01	3650	1.6E-01	5150	< 1.0E-05